



# OMNIA XS<sup>basic</sup> PURE AND ULTRAPURE WATER SYSTEMS

**For demanding applications in  
the smallest of spaces**

# ABOUT BOROSIL SCIENTIFIC LTD.

A Legacy of Trust in Indian Laboratories



Borosil Scientific Ltd. is one of India's most trusted names in scientific and laboratory solutions, with a legacy spanning over five decades.

What began with high-quality laboratory glassware has evolved into a comprehensive scientific ecosystem serving laboratories across pharmaceuticals, research, diagnostics, academia, and industry.

Today, Borosil Scientific is recognized not just as a manufacturer, but as a long-term partner to laboratories, delivering products that combine precision, reliability, and compliance with strong after-sales support.

**LABQUEST**<sup>®</sup>  
BY **BOROSIL** Scientific

**A Complete Instrumentation Platform for Modern Laboratories in our LabQuest product range**

## BOROSIL SCIENTIFIC'S STRENGTH IN INDIA



Nationwide distribution network



Strong service and application support



Deep penetration into pharma QC, academia, diagnostics, and CROs



Proven understanding of Indian laboratory conditions



Commitment to quality, consistency, and customer confidence

## From Distillation to Advanced Purification

Borosil Scientific's journey of expansion in laboratory water systems



**1962**

Entry into scientific products and laboratory glassware



**2008**

Laboratory glassware manufacturing facility, Bharuch (Gujarat)



**2015**

Launch of LabQuest | Entry into laboratory instrumentation



**2020**

Introduction of on-demand distillation units



**2024**

Launch of quartz cabinet distillation units (QCD)



**2026**

Launch of advanced water purification systems in collaboration with StakPure GmbH

# ABOUT STAKPURE

## StakPure GmbH — German Expertise in Water Purification



StakPure GmbH is a Germany-based specialist dedicated to the design and manufacture of pure and ultrapure laboratory water systems. With over 25 years of industry experience across laboratories on all continents, StakPure has established itself as a trusted global partner for high-performance laboratory water solutions.

StakPure systems are trusted by laboratories across Europe and international markets, and are engineered to meet stringent global standards, including:



- ASTM
- ISO 3696
- CLSI Reagent Water guidelines

Driven by German engineering principles and a strong focus on precision, consistency, and long-term reliability, StakPure delivers water purification systems designed for demanding analytical, research, and quality control applications worldwide.



This enables laboratories to access **Type I, Type II, and Type III** water solutions under a unified, globally aligned platform.

### Key highlights of the collaboration:

-  Equivalent global purity standards now available with local support
-  Systems designed for consistent performance and low cost of ownership
-  Complete coverage from RO water to 18.2 MΩ·cm ultrapure water
-  Seamless integration with Borosil Scientific's existing SDU, DDU, and QCD distillation portfolio

# H<sub>2</sub>O pure. Pure and ultrapure water from the super slim Omnia xs<sup>basic</sup> compact system with intuitive dispenser.

Work space in laboratories must be used efficiently.  
The Omnia xs system frees up space on the lab bench  
and makes work more efficient.

Despite the extremely compact design in xs format, the system works  
in a resource-saving and completely autonomous way. Accessories  
such as a leakage sensor, pressure reducer, and pre-treatment  
cartridges are already integrated in the compact housing.  
This saves space in the laboratory and also ensures  
exceptional operational and occupational safety.



Reliable. Reproducible. The quality of the ultrapure water is what counts. Consistently high water quality is crucial for the reproducibility of the analysis results.

Constant, highest quality standard. Even in ultrapure water systems stagnant water can lead to the formation of biofilm. That is why our Omnia series has a recirculation function that prevents the growth.



Super flat dispenser arm.



Autonomous specialist with integrated pre-treatment and ultrapure water cartridge. Simple cartridge change in seconds.



Equipped with OneHandOperation-Dispenser<sup>basic</sup>, removable, rotatable and swiveling with flexible connection for convenient water withdrawal.

# OmniaPure xs<sup>basic</sup>

## The specialist.

## For H<sub>2</sub>O pure type I.

When your need is for highest quality pure water that fulfils the demands of analytical and life science laboratory requirements, then one of these OmniaPure systems will be the right choice for you. The incorporated pre-treatment constantly ensures the reliability of your experimental results and reduces running costs.

### Features

- OptiFill<sup>basic</sup> dispenser is standard
- Simple and economical filter change
- Leakage sensor is standard
- Integrated pressure reducer is standard
- Very space saving
- Ready-to-use, including filter cartridges



One hand operation



Easy water dispensing



Fits neatly on the wall



Surface-efficient – so narrow that it almost fits on an A4 sheet ...

Specifications	OmniaPure xs <sup>basic</sup>	OmniaPure xs <sup>basic</sup> UV
<b>Ultrapure water values type I</b>		
Conductivity at 25 °C [ $\mu\text{S}/\text{cm}$ ]	0.055	0.055
Resistance at 25 °C [ $\text{M}\Omega \times \text{cm}$ ]	18.2	18.2
TOC-value* [ppb]	< 10	< 5
Dispensing performance [l/min.]	up to 2	up to 2
Dispensing preset volumes	optional	optional
Particles** > 0.2 $\mu\text{m}$ [1/ml]	< 1	< 1
Bacteria** [CFU/ml]	< 0.01	< 0.01

\* The values given are typical and may vary depending on the quality of the feed water      \*\* With sterile filter capsule 0.2  $\mu\text{m}$

### Feedwater requirements

Water prepared by ion exchange, reverse osmosis, electrodeionisation or distillation

Feedwater pressure [bar]	1 up to 6	1 up to 6
Conductivity at 25 °C [ $\mu\text{S}/\text{cm}$ ]	< 100	< 100
TOC-value [ppb]	< 50	< 50

### Technical data


Feedwater connection	R3/4"	R3/4"
Electrical connection [Volt/Hz]	90-240/50-60	90-240/50-60
Connected load [W]	120	120
Ambient temperature [°C]	4 up to 40 [Recommendation: 10 up to 25]	4 up to 40 [Recommendation: 10 up to 25]
Dimensions [W x H x D mm]	240 x 530 x 435	240 x 530 x 435
Weight dry [kg]	14	14

The device can be installed either on a bench or on a wall.

Article no.	System type*	Typical applications
STBL18000004	OmniaPure xs basic	AAS, IC, ICP, buffers and media preparation
STBL18000005	OmniaPure xs basic UV	Ultra-trace analysis, ICP-MS, HPLC, TOC-analysis

\* Pre-treatment cartridge-, ultrapure water cartridge and sterile filter capsule 0,2  $\mu\text{m}$  included

Accessories	
STBL19200305	Wall mount Omnia xs
STBL19200500	Volume dosing Omnia xs
STBL19200090	Disinfection cartridge Omnia xs
STBL19200057	Disinfectant Omnia – 3/pcs. pack
STBL19200091	Disinfection kit Omnia xs complete

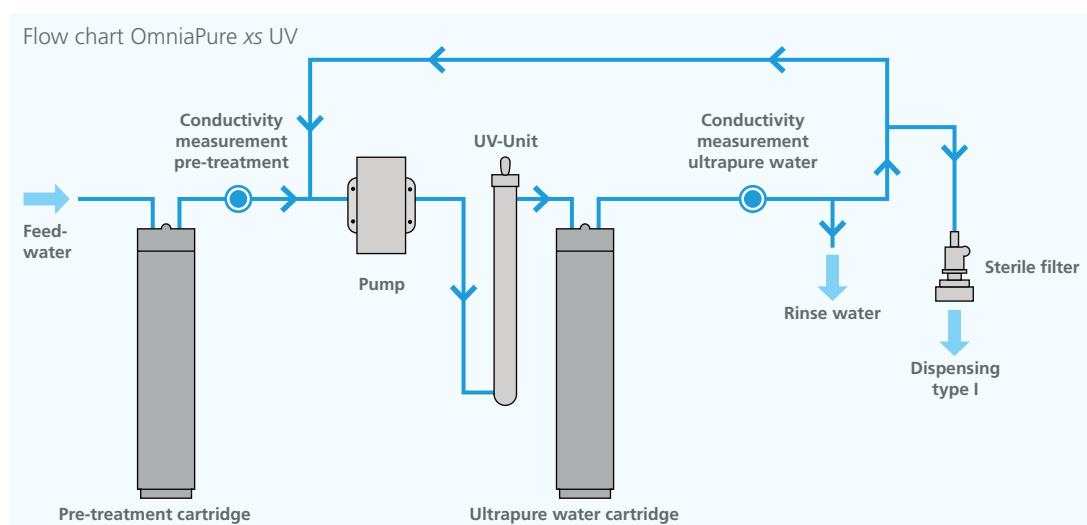

# OmniaTap xs<sup>basic</sup>

## The Allrounder.

## For H<sub>2</sub>O pure types I + II.

OmniaTap xs<sup>basic</sup> is the ideal system when both pure water and ultrapure water are required, but in relatively small amounts. The ability to provide both types from a single system results from the combination of ultramodern purification technologies. These also make it possible to connect the system directly to tap water. A press on the dispenser button activates dispensing of ultrapure water type I via the digital dispenser control. The adaptable pure water tanks with a volume of 7, 30 or 60 liters enable the continuous withdrawal of type II laboratory water for other applications.

### Features


- OptiFill<sup>basic</sup> dispenser is standard
- Simple and economical filter change
- Leakage sensor is standard
- Ready-to-use, including filter cartridges



One hand operation



Easy water dispensing



Fits neatly on the wall

### Tank options



#### 7-liter docking tank

Can be mounted directly on the appliance, space-saving and efficient.

#### 30-liter tank

Flexible installation – on the laboratory bench or under-bench in the laboratory cabinet, with or without base.

#### 60-liter tank

Ideal for larger quantities of water – also suitable for under table installation\* without a base.

\* Installation height with tank ventilation filter 80 cm

Specifications	OmniaTap xs <sup>basic</sup> 5	OmniaTap xs <sup>basic</sup> 5 UV
<b>Ultrapure water values type II</b>		
Pure water performance at 15°C [l/h]	5	5
Conductivity at 25°C [µS/cm]	0.067 up to 0.1	0.067 up to 0.1
Resistance at 25°C [MΩ x cm]	15 up to 10	15 up to 10

<b>Ultrapure water values type I</b>		
Conductivity at 25°C [µS/cm]	0.055	0.055
Resistance at 25°C [MΩ x cm]	18.2	18.2
TOC-value* [ppb]	< 10	< 5
Dispensing performance [l/min.]	up to 2	up to 2
Dispensing preset volumes	optional	optional
Particles** > 0.2 µm [1/ml]	< 1	< 1
Bacteria** [CFU/ml]	< 0.01	< 0.01

\* The values given are typical and may vary depending on the quality of the feed water      \*\* With sterile filter capsule 0.2 µm

Feedwater requirements		
Tap water according to DIN 2000		
Feedwater pressure [bar]	1 up to 6	1 up to 6
Conductivity at 25°C [µS/cm]	< 2000*	< 2000*
Colloid index SDI	< 5**	< 5**
Dissolved CO <sub>2</sub> [ppm]	< 30	< 30
Free chlorine [ppm]	< 0.1	< 0.1
TOC-value [ppm]	< 2	< 2
Hardness [as CaCO <sub>3</sub> ] [ppm]	< 300	< 300
Iron/manganese [mg/l]	< 0.05	< 0.05
Silicia [ppm]	< 30	< 30
pH range	4 up to 10	4 up to 10

\* Feed water with high conductivity can reduce the service life of the cartridges and increase the conductivity of type III water. If the conductivity is between 800 and 2000 µS/cm, we recommend using a water softener

\*\* With an SDI/FI between 3 and 5, pre-treatment must be used

Technical data		
Feedwater connection	R3/4"	R3/4"
Electrical connection [Volt/Hz]	90-240/50-60	90-240/50-60
Connected load [W]	120	120
Ambient temperature [°C]	4 up to 40 (Recommendation: 10 up to 25)	4 up to 40 (Recommendation: 10 up to 25)
Dimensions with 7 l docking tank* [W x H x D mm]	253 x 530 x 520	253 x 530 x 520
Weight dry [kg]	19	19

The device can be installed either on a bench or on a wall.

Article no.	System type*	Typical applications
STBL18120051	OmniaTap xs basic 5	AAS, IC, ICP, buffers and media preparation
STBL18120052	OmniaTap xs basic 5 UV	Ultra-trace analysis, ICP-MS, HPLC, TOC-analysis

\* An external tank is required to operate the OmniaTap xs<sup>basic</sup>. RO cartridge, ultrapure water cartridge, sterile filter capsule 0.2 µm, sterile overflow and sterile vent filter included

#### Pure water tanks for OmniaTap devices


Article no.**	Volume	Material	Dimensions* (W x H x D mm)	Weight dry (kg)
STBL16500017	7 l	PE	Docking tank	2
STBL16500031	30 l	PE	338 x 568 x 413	6.5
STBL16500061	60 l	PE	338 x 778 x 413	8

Accessoires	
STBL19200020	Pre-treatment unit 5 µm + hardness stabilization
STBL19200022	Pre-treatment unit 5 µm + activated carbon
STBL19200305	Wall mount Omnia xs
STBL19200090	Disinfection cartridge Omnia xs
STBL19200057	Disinfectant Omnia – 1 pcs./pack
STBL19200091	Disinfection kit Omnia xs (Cartridge + 1 pcs. disinfectant)
STBL19102100	Bio filter capsule
STBL19200050	Volume dosing Omnia xs

#### Pure water tank with integrated booster pump


Article no.**	Pump capacity (l/h-bar)	Weight dry (kg)
STBL16500032	100-2	10
STBL16500062	100-2	11

\* Without aeration filter  
\*\* With level sensor, sterile overflow, ventilation filter + CO<sub>2</sub> absorber

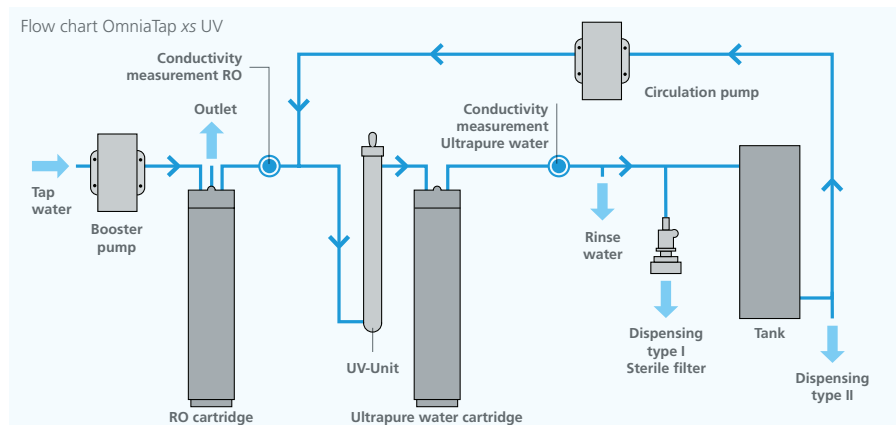

Accessoires	
STBL19200050	UV tank disinfection unit Omnia 254 – 16 watts
STBL28000084	Tank removal set for OmniaTap 7-liter docking tank
STBL19501500	Wall mount for pure water tank 30/60 l
STBL16580000	External pump station 100 l/h - 2 bar
STBL16561201	External pump station 2000 l/h - 3.5 bar

## A Collaboration Built to Deliver

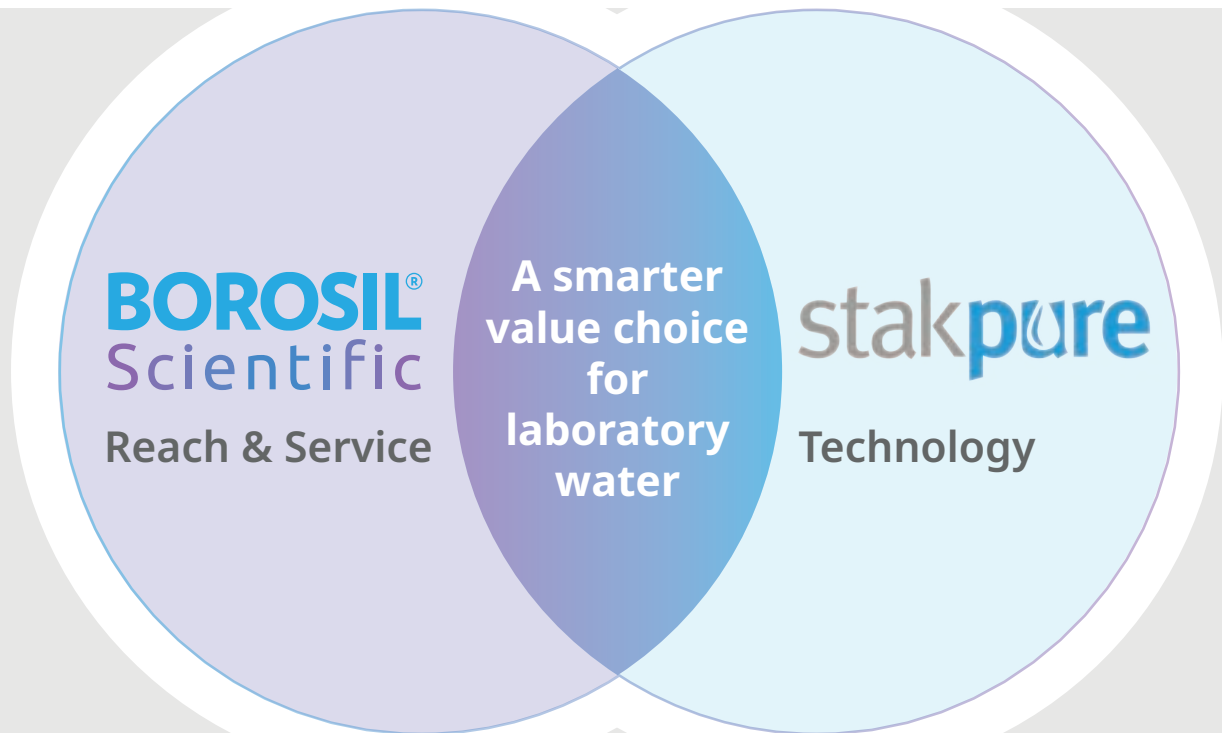

**BOROSIL<sup>®</sup>**  
Scientific

1101, Crescenzo, G-Block, Opp. MCA Club,  
Bandra Kurla Complex, Bandra (E), Mumbai - 400 051, India  
T : +91 22 6740 6300 F : +91 22 6740 6514  
E : borosil@borosil.com W : www.borosil.com

Pune Manufacturing Unit:  
**BOROSIL SCIENTIFIC LTD.**  
21-24, Plot No. 8, Indialand Global Industrial Park,  
Hinjewadi Phase - 1, Pune - 411 057

**Service Support:**

✉ lab.support@borosil.com  
☎ 1800-224-551

Visit Website



Connect with us  
on LinkedIn

